


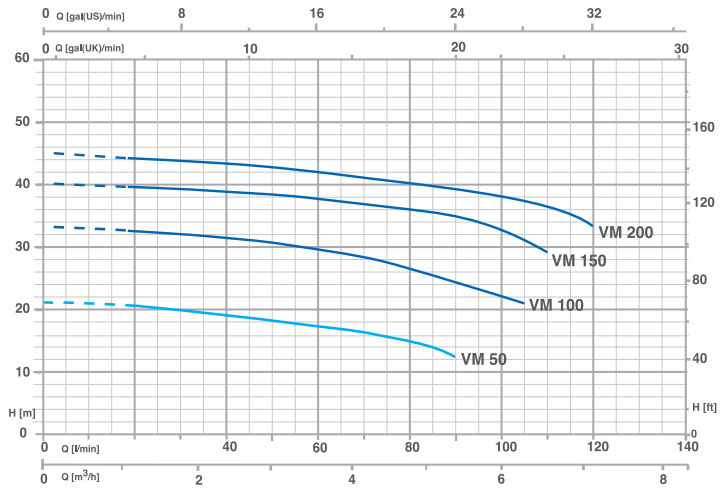




## Series VM SINGLE IMPELLER CENTRIFUGAL ELECTRIC PUMPS

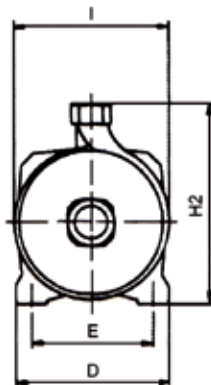

TYPE		P2		AMPERE		Capacity ( m <sup>3</sup> /h - l/min)										DNA	DNM
1~ Single phase	3~ Three phase	(HP)	(kW)	1~	3~	0	1.2	2.4	3.6	4.8	5.4	6.6	7.2	7.8			
				1x230V 50Hz	3x400V 50Hz	0	20	40	60	80	90	110	120	130			
Total head (m)																	
VM 50	VM 50 T	0.5	0.37	2.8	1.1	21.5	20.5	19	17	15	12					1"G	1"G
VM 50**	VM 50 T	0.5	0.37	2.8	1.1	21.5	20.5	19	17	15	12					1"G	1"G
VM 100	VM 100 T	1	0.74	5.7	2.0	33	32.5	31.5	29.5	27	25					1"G	1"G
VM 100**	VM 100 T	1	0.74	5.7	2.0	33		31.5	29.5	27	25					1"G	1"G
VM 150	VM 150 T	1.5	1.1	8.5	3.4	40.5	39.3	38.6	37.5	35.6	34.6	29.5				1"G	1"G*
VM 200	VM 200 T	2.2	1.65	10.3	4.9	45.1	44.1	43.3	42.3	40.5	39.2	36.4	33.5			1"G	1"G*

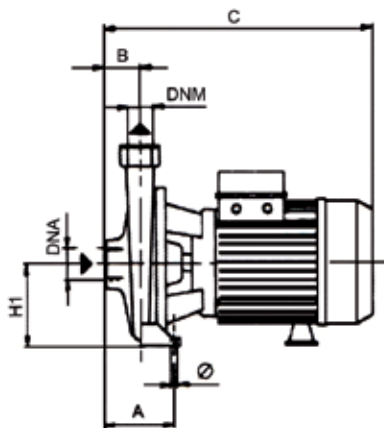

\* Option DNA x DNM 1"1/4 x 1"

\*\* ใ้ป้ด Noryl

TYPE	DIMENSION (mm.)											PACKING (mm.)			Weight Kg.
	A	B	C	D	E	I	∅	H1	H2	DNA	DNM	N	L	M	
VM 50	75	45	270	160	110	165	9.5	82	203	1"G	1"G	240	280	180	8.6
VM 100	82	45	305	180	140	188	9.5	97	232	1"G	1"G	270	320	210	15.9
VM 150	86	46	345	195	180	196	9.5	105	257	1"G	1"G*	280	360	240	19.5
VM 200	95	48	345	230	180	230	9.5	120	290	1"G	1"G*	305	360	240	23.3

Cast iron pump body , Cast iron pump bracket , Brass impeller or noryl on request , stainless steel shaft or mild steel , Max temperature of pumped liquid 50 °C for noryl and 90 °C for Brass , max working pressure 8 bar for , Carbon/ceramic Mechanical Seal , Motor T.E.F.C 2 poles Insulation Class F Protection IP 55 or IP 44